



NAVAL FILTRATION SOLUTIONS TRIPLEX FILTER MANIFOLD MIL-DTL-24402/3





HYDRAULIC FILTRATION


Rated Flow	150 gpm
Operating Pressure	400 psig
Proof Pressure	900 psig
Material	Stainless Steel
Fluid	MIL-PRF-17331
Filter Element (3)	B-size per MIL-DTL-24402 or SAE J2321
Options	DP Gauge; Bypass Valve



PERFORMANCE AT-A-GLANCE


Triplex

MIL-F-24402 (B-size) Element: P/N 325807
40 micron
Fluid MIL-PRF-17331 @ 100F

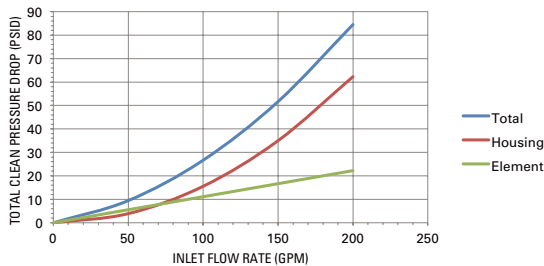

Triplex


SAE J2321 Element: P/N 336663
7 micron
Fluid MIL-PRF-17331 @ 100F

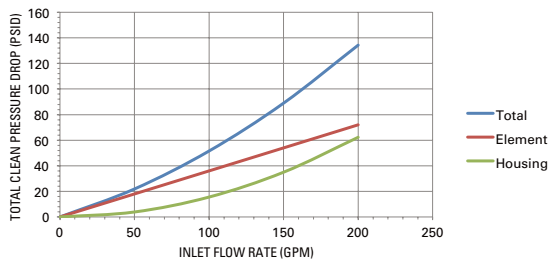

TRIPLEX SPECIFICATIONS


Envelope

MIL-DTL-24402/3A(SH)

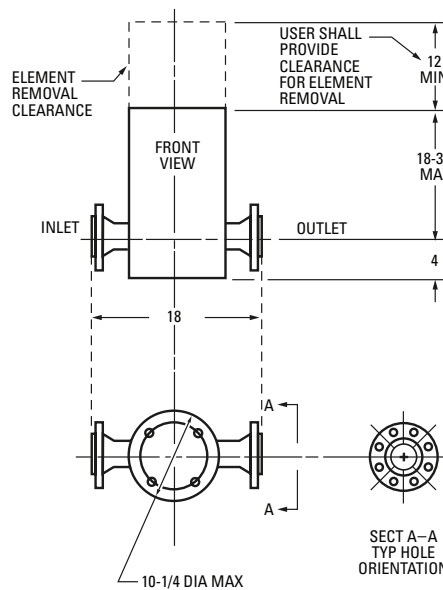


THREE-ELEMENT FILTER HOUSING OUTLINE DIMENSIONS

Hydraulic Schematic



BYPASS



NO BYPASS

For more information, contact:

Donaldson Company, Inc., Aerospace & Defense Group
1400 West 94th Street, Minneapolis MN 55431-2370

Donaldson Defense +1-877-314-9637
defense.americas@donaldson.com

Europe +33 1 30866698
defense.emea@donaldson.com

To learn more about the Donaldson Company, Inc., Aerospace & Defense Group visit www.DonaldsonAerospace-Defense.com

Brochure No. F112277 ENG (11/15)

© 2015 Donaldson Company, Inc. All rights reserved.

Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice. Printed in the U.S.A.